SensaTouch Multi-Touch Overlay Driver User Manual

Driver Installation

Driver Interface Instruction

Driver Installation

Step One:
Plug USB cable of device into PC.

Step Two:
Double click the installer, choose the destination folder, and click *install*.

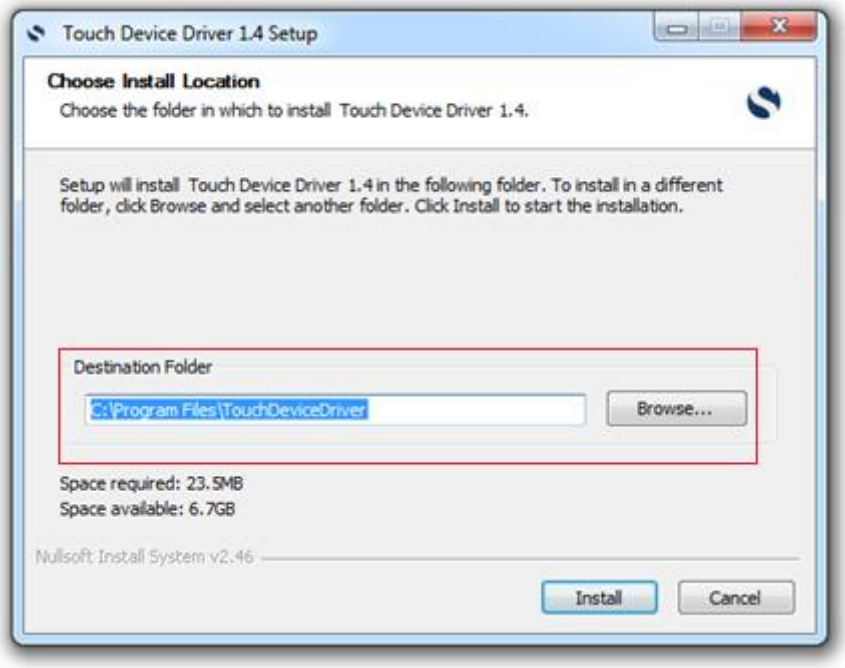
Touch Device Driver 1.4 Setup
Choose Install Location
Choose the folder in which to install Touch Device Driver 1.4.
Setup will install Touch Device Driver 1.4 in the following folder. To install in a different folder, click Browse and select another folder. Click Install to start the installation.
Destination Folder
C:\Program Files\TouchDeviceDriver
Browse...
Space required: 23.5MB
Space available: 6.7GB
Nullsoft Install System v2.46
Install
Cancel

Step Three:
Tick *Always trust software from "SensaTouch Co., Ltd"* and click *Install*.

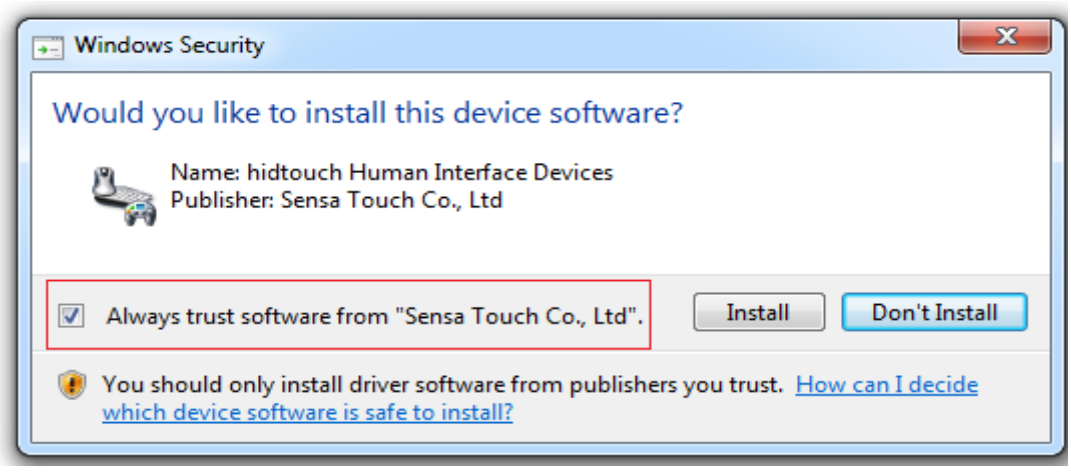
Windows Security
Would you like to install this device software?
Name: hidtouch Human Interface Devices
Publisher: Sensa Touch Co., Ltd
Always trust software from "Sensa Touch Co., Ltd".
Install
Don't Install
You should only install driver software from publishers you trust. How can I decide which device software is safe to install?

Step Four:
Wait for the installation.

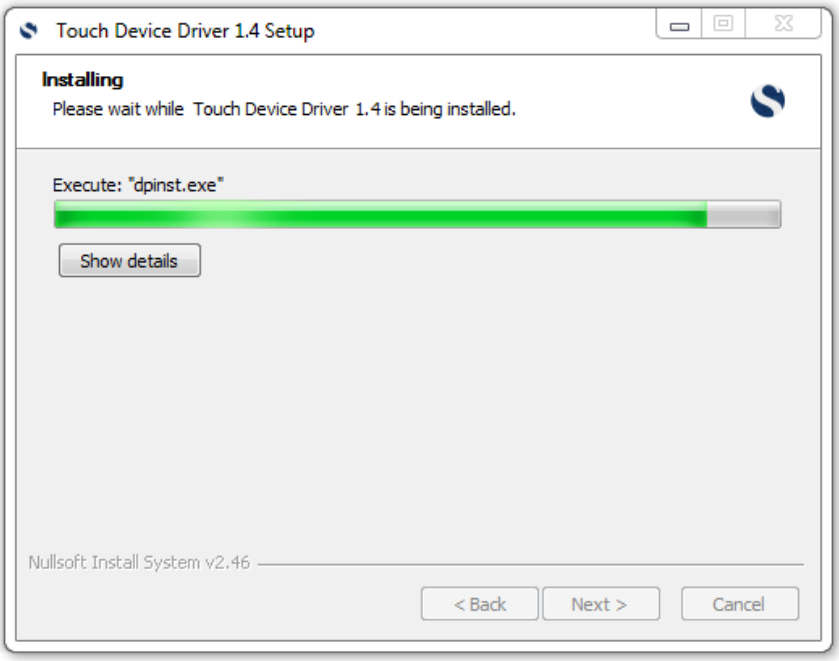

Step Five：
Click *Next* when *Device Driver Installation Wizard* page show up.

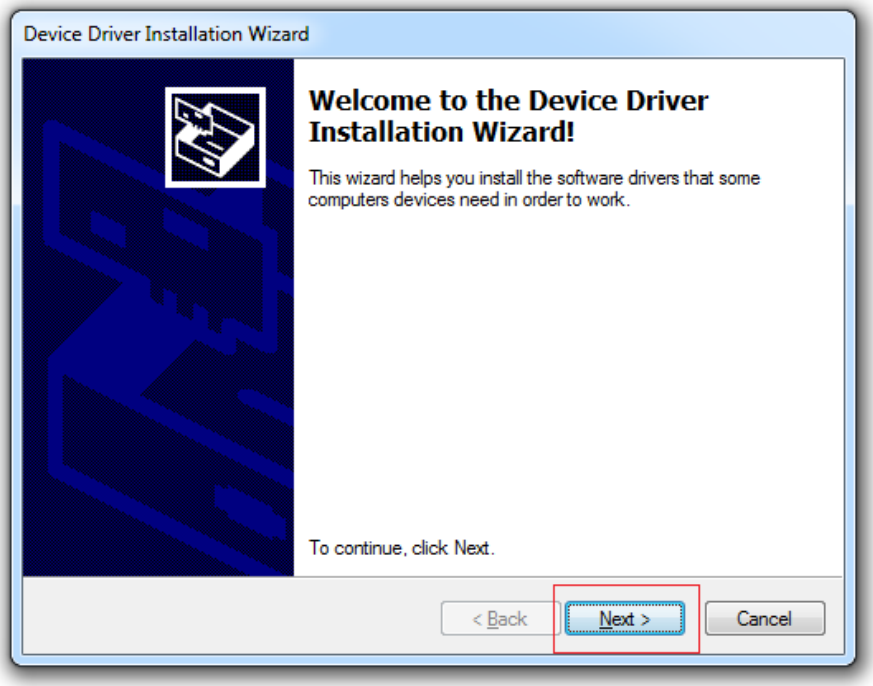
Device Driver Installation Wizard
Welcome to the Device Driver Installation Wizard!
This wizard helps you install the software drivers that some computers devices need in order to work.
To continue, click Next.
< Back
Next >
Cancel

Step Six:
Click *Finish* when installation is completed.

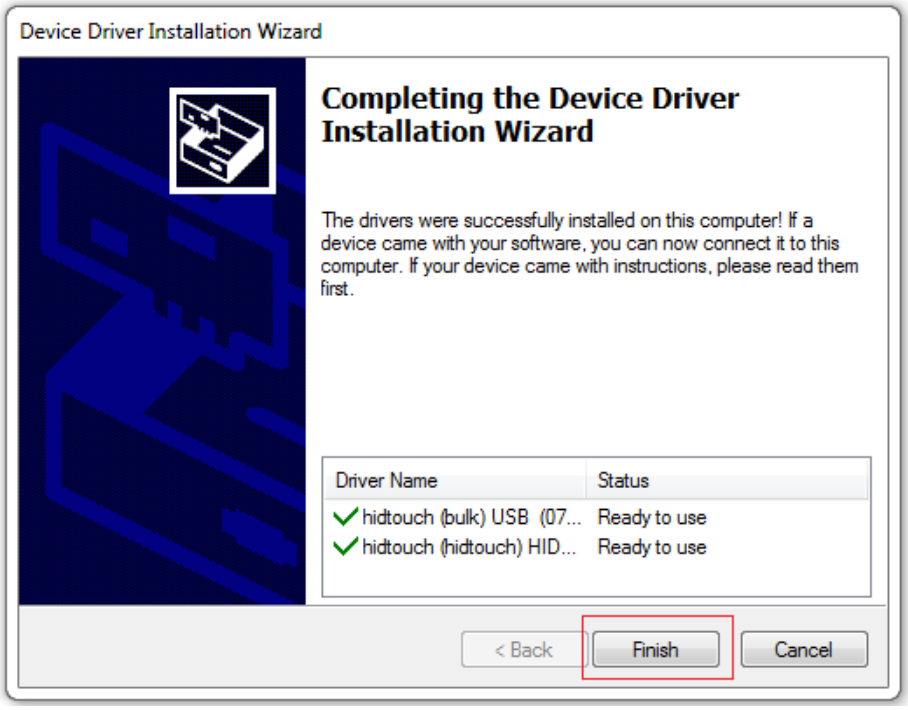
Device Driver Installation Wizard
Completing the Device Driver Installation Wizard
The drivers were successfully installed on this computer! If a device came with your software, you can now connect it to this computer. If your device came with instructions, please read them first.
Driver Name
Status
hidtouch (bulk) USB (07...
Ready to use
hidtouch (hidtouch) HID...
Ready to use
< Back
Finish
Cancel

Step Seven:
Choose *Reboot now* and click *Finish* to complete the driver installation.

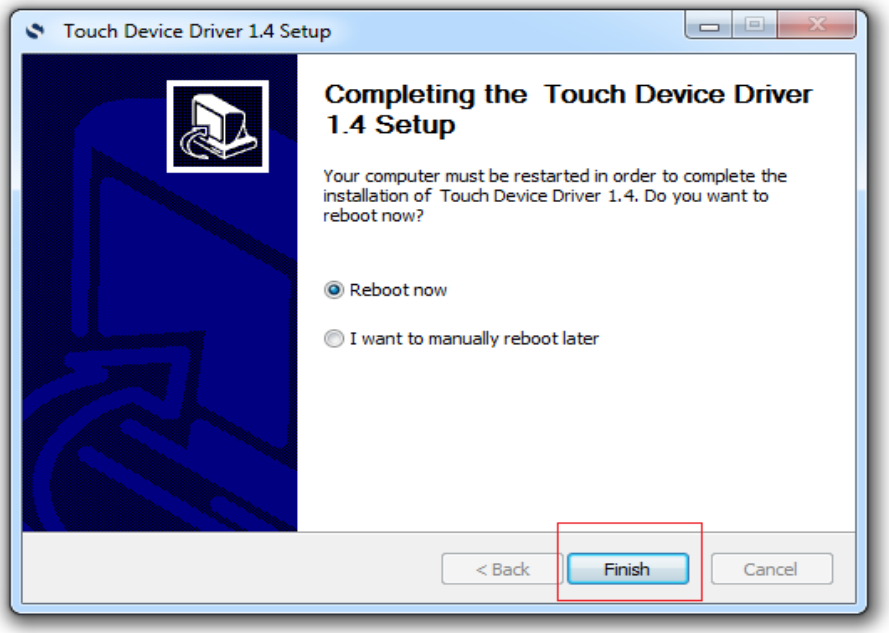
Touch Device Driver 1.4 Setup
Completing the Touch Device Driver 1.4 Setup
Your computer must be restarted in order to complete the installation of Touch Device Driver 1.4. Do you want to reboot now?
Reboot now
I want to manually reboot later
< Back
Finish
Cancel

Driver Interface Instruction：

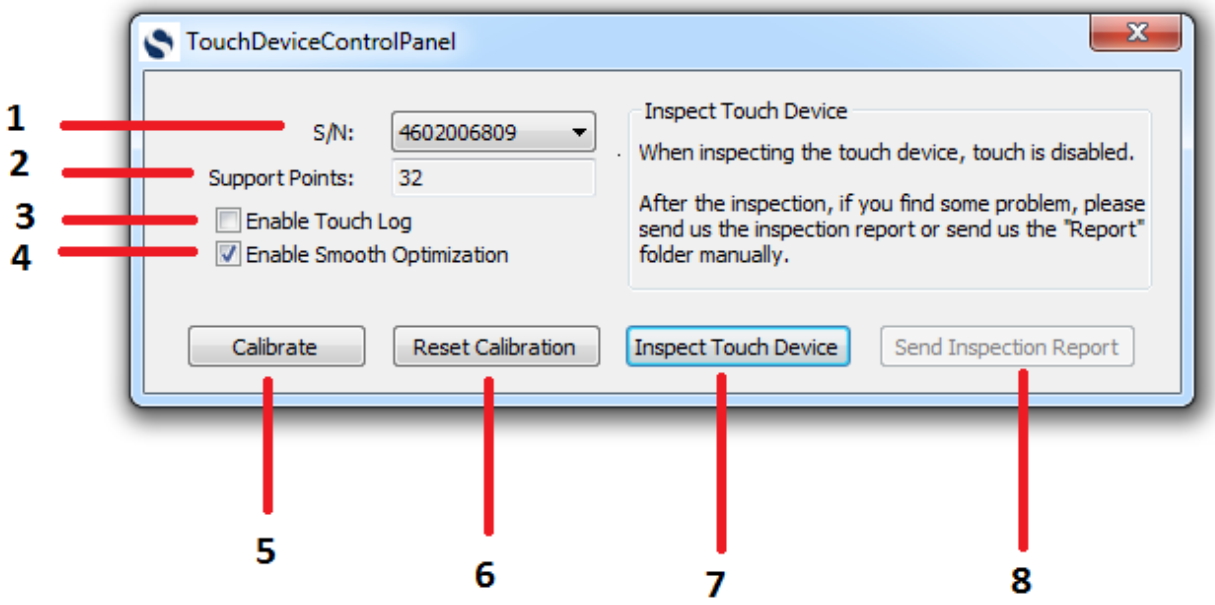

1. **S/N:Serial Number:**

   Unique serial number for the device.
   Customer can use this feature to check if the device is detected by PC by observing if serial number of products has been showed up.

2. **Support Points**:

   The number of touch points the device can support.

3. **Enable Touch Log**

   Touch log is the processing records of the product.

   Note: The setting of Touch Log is off by default. Do not change it if unnecessary

4. **Enable Smooth Optimization:**

   Optimize the recognized touch points with smoothness and precision.

   Note: The setting of Smooth Optimization is on by default. Do not change it if unnecessary

5. Calibrate:

Click *Calibrate* and do **NOT** touch the screen until initialization is completed.

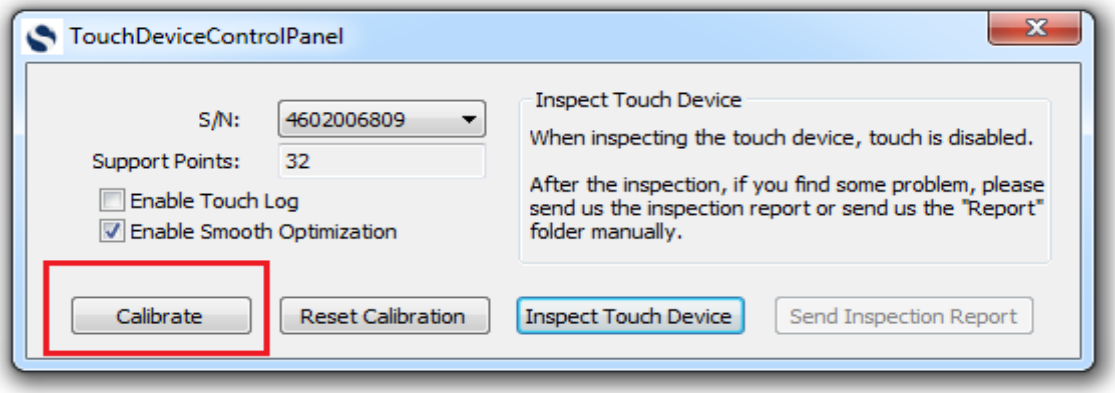

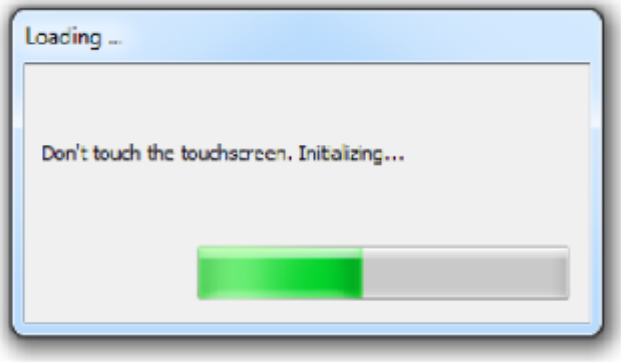

Touch on the screen.

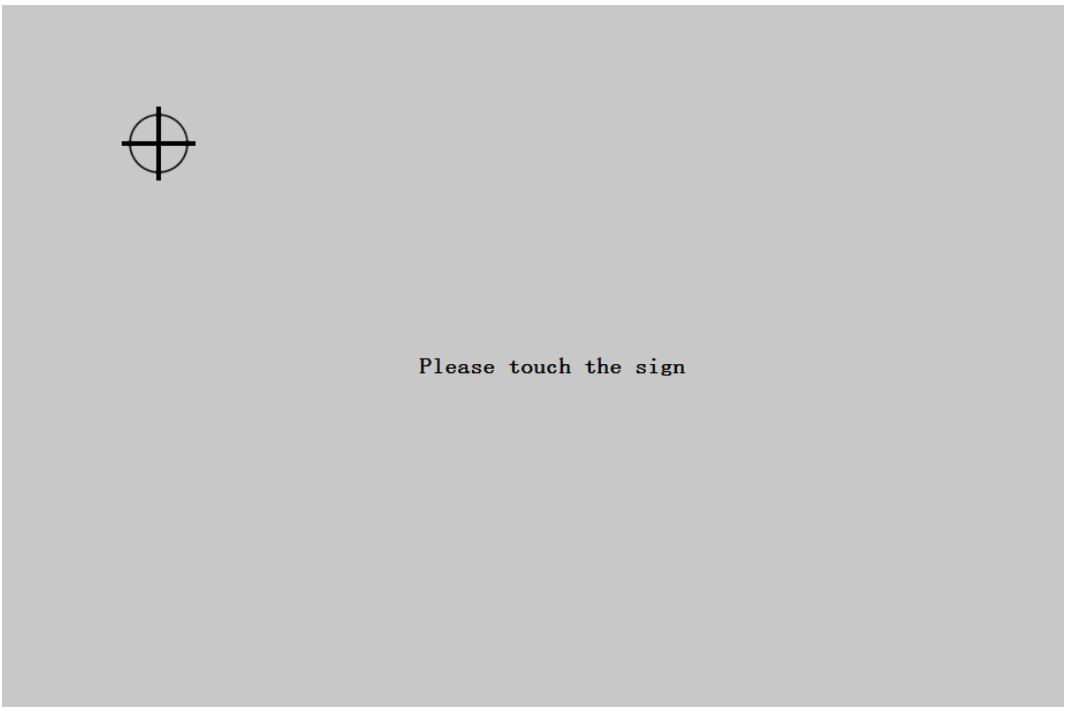

Release your finger when turn red.

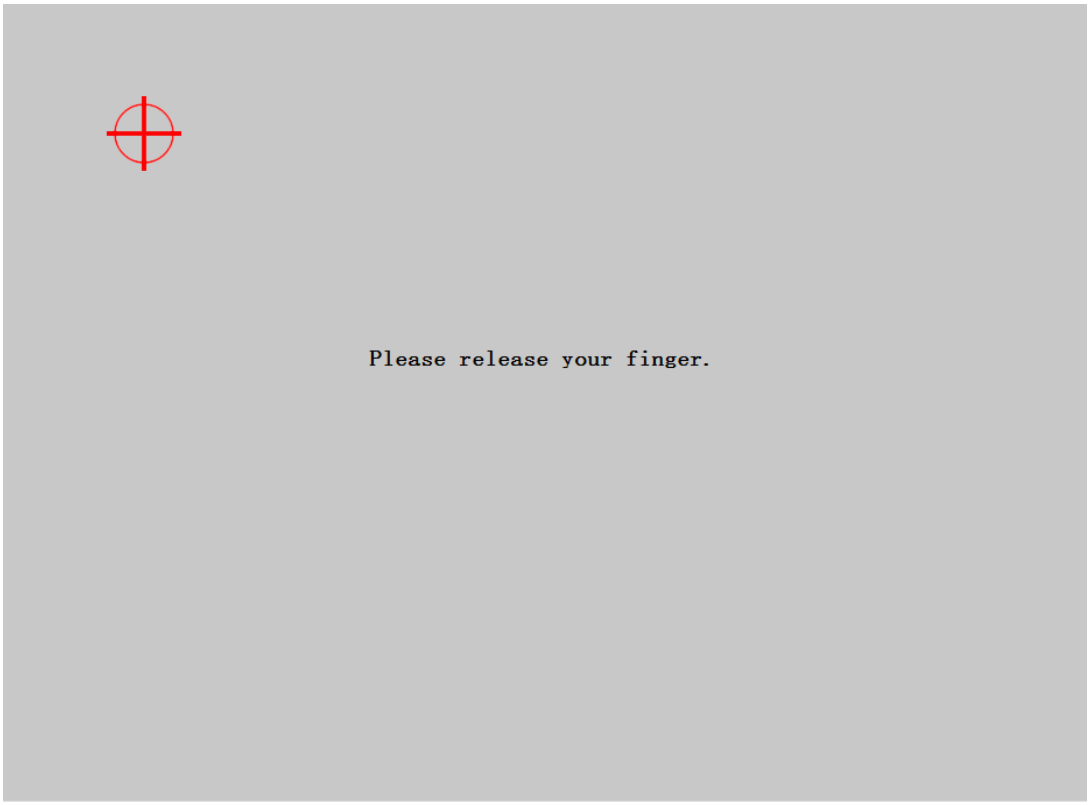

Repeat the same steps with four , and then the calibration process is completed.

6. Reset Calibration

Click *Reset Calibration* to initialize the calibration.

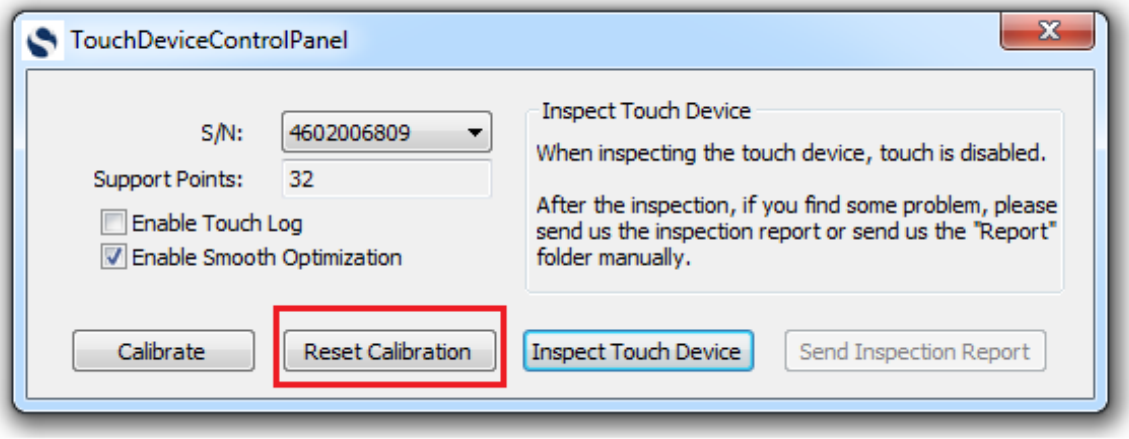

7. Inspect Touch Device: Inspect if the product is function properly

Click *Inspect Touch Device*, if the result comes with a **Green Tick**. It indicates the device is function properly.

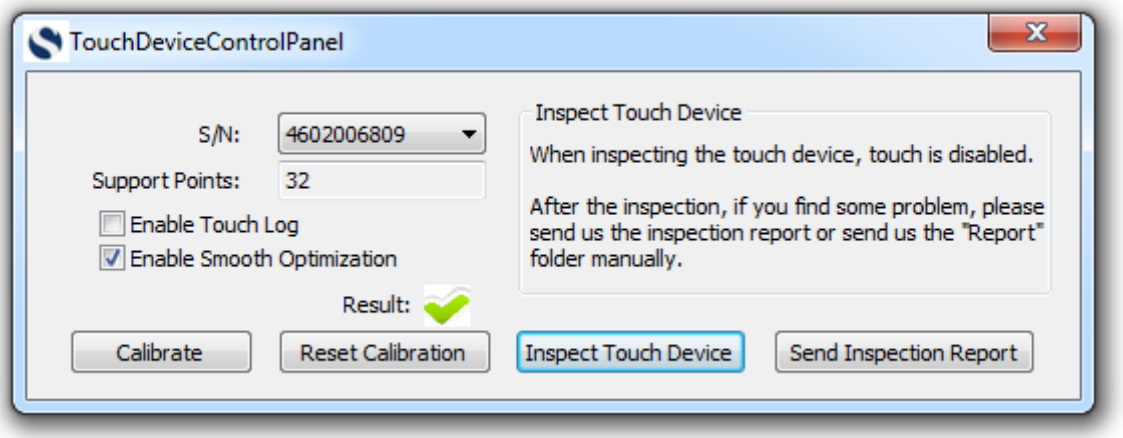

Click *Inspect Touch Device*, if the result comes with a **Red Cross**. It indicates the device is not function properly.

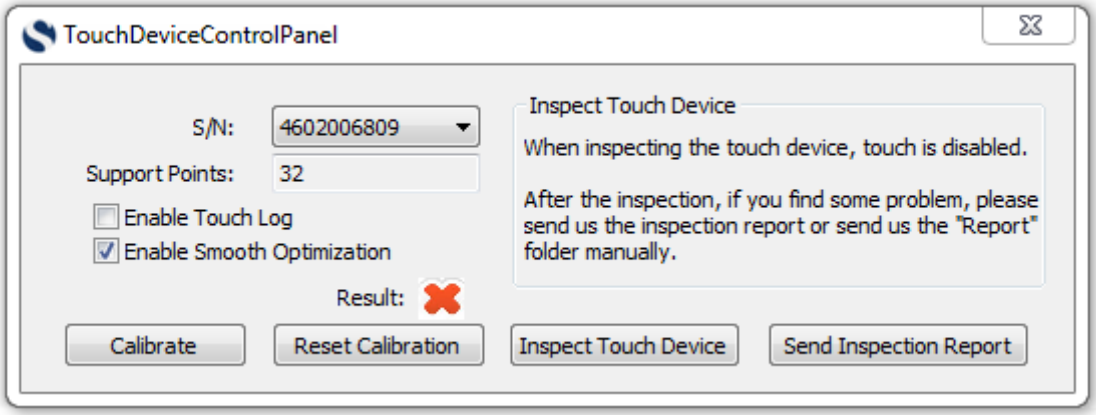

8. Send Inspection Report:

Send an inspection report if your inspect result is a **Red Cross**.
Fill in the *Sender Email*, *Receiver Email* and *Description*. Please *Send* the report to *support@sensa-touch.com*.